


檢相計(電子式)


PHASE SEQUENCE INDICATOR

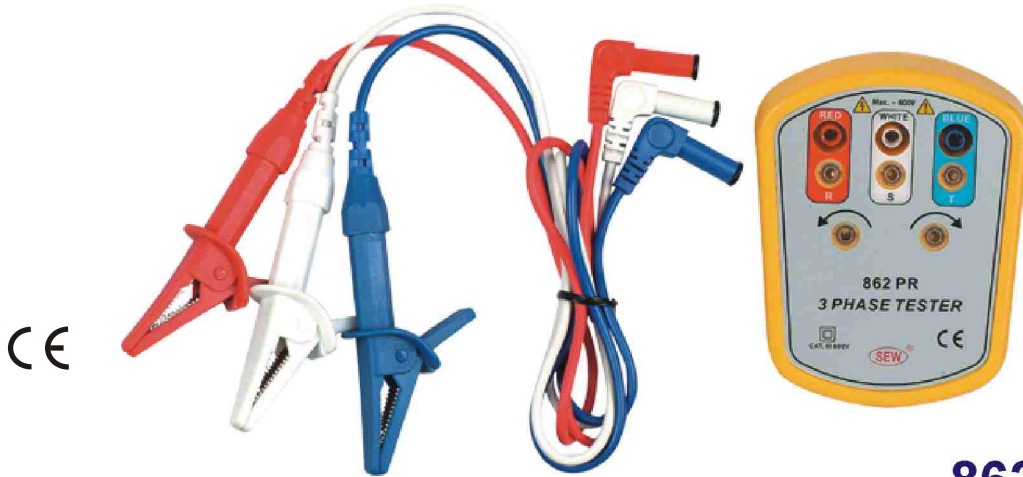

862 PR

- 量測三相電源的相序和欠相狀況，在了解狀況後，再行正確接電，可確保不被燒毀和正常運作。
- 使用大型鱷魚夾，方便夾住端子。
- 適合馬達製造業、水電裝配業和電機電工人員運用。
- 防水保護功能。
- 測試線長度可隨客戶需要設計。
- 符合EN 61010-1 CAT III 600V/CAT IV 300V。

使用電壓範圍	100-600V 交流電壓
相序指示電壓	40-70Hz
最大消耗電流	7mA 交流電壓
外形尺寸	102(長)*78(寬)*32.5(高)mm
重量	機體：115 克 測試線：97 克
附件	測試線*1(組) 軟袋*1(個) 說明書*1(本)

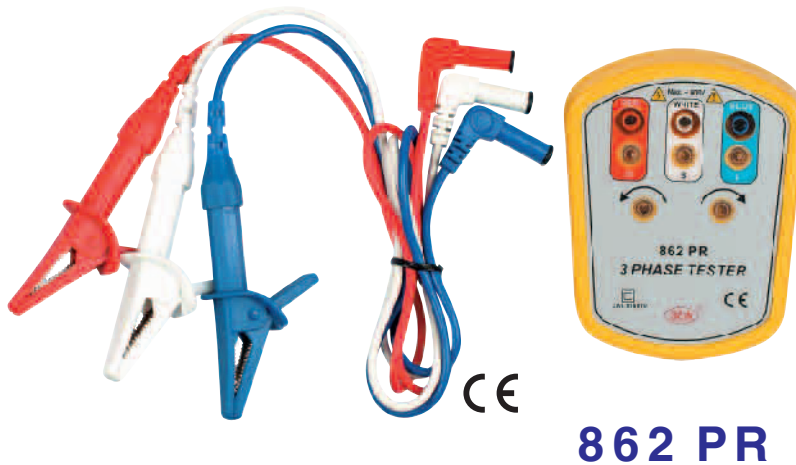PHASE SEQUENCE INDICATOR

862 PR
FEATURES

- Two functions in one unit.
Including open phase and phase sequence.
- Large size alligator clips.
Can easily clip on switch-boards terminals.
- Highly reliable.
Identifies 3 phase sequence and open phase check.
- Functional design
This model is ideal for installing conveyor lines, pump systems and interconnected drivers.
- Water proof.
- EN 61010-1 CAT III 600V/CAT IV 300V
- Special test lead length are available on request.

SPECIFICATIONS

Input Voltage	100-600V AC
Frequency Range	45-70 Hz
Circuit Structure	All electronic (not mechanical)
AC Power Consumption	Approx. 7mA per phase rotation filed indicator
Dimensions	102(L) x 78(W) x 32.5(D)mm
Weight	862 PR : 115g test leads : 97g Total : 212g
Accessories	Test leads (AL-34) Vinyl case Instruction manual