

## 音響線路阻抗檢測計



### AUDIO IMPEDANCE TESTERS

- 供量測音響擴大機線路阻抗，以期提高音質效果。
- 三檔量測檔位：20Ω/200Ω/2000Ω。
- 使用頻率：1000Hz。
- 防塵罩設計，保護極插座，方便儲放。
- 電源不足顯示。
- 讀值鎖定功能。
- 可量測變壓器內阻。
- 自動關機設計
- 符合IEC/EN 61010-1 CAT III 1000V。



### 2706 IM

#### 電氣規格(23±5°C ≤ 80%RH)

量測檔位	0-20 / 0-200 / 0-2000Ω
量測頻率	1000HZ
準確度	20Ω : ±(2%讀值+2 位數)或±0.1Ω 200Ω / 2000Ω : ±(2%讀值+2 位數)
量測系統	820Hz 2mA 定電流
電池能量顯示	電源能量不足，LCD 上顯示： 
數值鎖定顯示	LCD 顯示： 
液晶顯示器	3 1/2 位(最大顯示值 1999)
使用電池	1.5V(SUM-3)*6(顆)
外形尺寸	205(長)*90(寬)*55(高)公厘
附件	測試線*1(組) 說明書*1(本) 攜帶箱*1(個) 電池



**STANDARD**

# Test & Measuring Instruments

## AUDIO IMPEDANCE TESTER



### 1506 IM

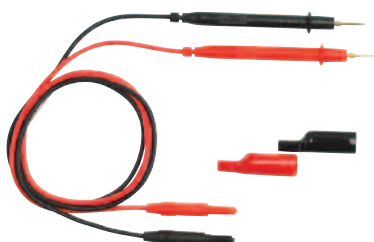
#### FEATURES

- High quality Taut Band movement.
- Battery-powered audio impedance tester.
- Timer function for hand free use.
- Battery indicator.
- The tester measure with a frequency of 1KHz.
- Measure speaker's impedance.
- Measure speaker lines (connected to load).
- Help to calculate and check audio power systems.
- Ideal for public address installation and maintance.
- Can measure transformer impedances.
- IEC 1010 CAT II 100V

#### SPECIFICATIONS

Measuring System	Constant current inverter with 1KHz approx. 2mA
Measuring Ranges	20Ω/200Ω/2KΩ
Accuracy	±2.5% of full scale
Power Source	1.5V (SUM-3) x 6
Dimensions	163(L) x 100(W) x 50(D)mm
Weight	Approx.420g (battery included)
Accessories	Test leads (AL-24SA) Heavy-duty case Instruction manual Batteries

#### Test leads



STANDARD ELECTRIC WORKS CO., LTD.

NO.106, SU WEI ROAD, PAN CHIAO, TAIPEI HSIEN, TAIWAN, R.O.C.

TEL: 886-2-22563125 FAX: 886-2-22556352 886-2-82573518

http://www.sew.com.tw e-mail: sales@sew.com.tw e-mail: sew@ms10.hinet.net

<http://www.51082245.com/sew.htm>