

數位絕緣阻抗計

DIGITAL H.V. INSULATION TESTER



6210A IN



6211A IN

- 微處理器控制設計。
- 絕緣阻抗量測四個檔位。
- 自動換檔。
- 量測電壓類比刻劃顯示。
- 量測時間顯示。
- 外來電壓顯示。
- EEPROM方式調校。
- 外殼堅固，使用與攜帶都方便。
- 符合EN / IEC 61010-1 CAT III。

電氣規格(23±5°C ≤ 80%RH)

6210A IN

6211A IN

量測檔位	0.5kV	1kV	2.5kV	5kV	1kV	2.5kV	5kV	10kV
量測範圍 (自動換檔)	0-25GΩ	0-50GΩ	0-125GΩ	0-250GΩ	0-50GΩ	0-125GΩ	0-250GΩ	0-500GΩ
準確度	±(3%讀值+3 位數)							
輸出電流限定	50uA-100uA							
外來電壓警示	> 500V 交流電壓							
操作環境	0°C-40°C 85%最大相對濕度							
使用電池	1.5V(C)*8(顆) 充電電池							
外形尺寸	330(長)*260(寬)*160(高)公厘							
重量	約 3500 克(含電池)							
附件	測試線*1(組) 說明書*1(本) 電池							



STANDARD

Test & Measuring Instruments

DIGITAL H.V. INSULATION TESTER



CE

6210A IN


FEATURES

- Microprocessor technology ensures high performance accuracy and reliability.
- Four insulation test voltages (DC V).
- Insulation resistance, auto ranging on all ranges.
- Bargraph indicates test voltage, decay can be observed during discharge.
- Measures insulation test time.
- Display warning of external voltage.
- Fully protected : crow bar.
- Housed in heavy duty carry case.
- EEPROM calibration.
- EN/IEC 61010-1 CAT III

SPECIFICATIONS

Test Voltage (DC V)	0.5KV	1KV	2.5KV	5KV
Measuring Ranges (Auto-Ranges)	0-25GΩ	0-50GΩ	0-125GΩ	0-250GΩ
Accuracy	±3%rdg ±3dgt			
Output Current Limit	50uA to 100uA (1W)			
Live warning	> 500V AC			
Operating-Temperature	0°C ~ 40°C			
Operating-Humidity	85% Max. relative humidity			
Weight	3.5kg Approx.			
Dimensions	330(L) x 260(W) x 160(D)mm			
Power Source	1.5V "C" x 8 Alkaline Batteries			
Accessories	Test leads Instruction manual Batteries			

Test leads

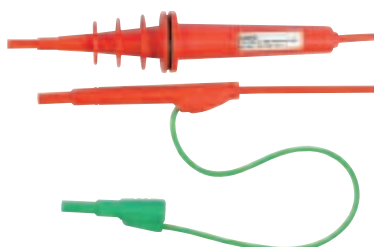


AL-50



AL-30



AL-30C

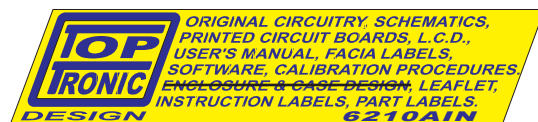

STANDARD ELECTRIC WORKS CO., LTD.

5F.,NO.105, Jhongcheng Rd., Tucheng Dist., New Taipei City 23674, Taiwan (R.O.C)

TEL: 886-2-22681528 FAX: 886-2-22681529

http://www.sew.com.tw e-mail: sales@sew.com.tw

<http://www.51082245.com/sew.htm>